

Jet™₁₀₀ Glue Application Valve

The **Jet™100** is a compact, non-contact glue valve capable of handling low to medium viscosity adhesives and midrange pressures.


The **Jet™100** glue valve has additional features designed to reduce set-up times and maintenance such as waterflushing, quick release bracketry and carton guides.

- Compact Size
- High Accuracy
- Fast Response for Pattern Flexibility at High Speed
- Low Set-Up and Maintenance Times for Increased Efficiency
- Used with Low, Medium or Standard Pressure
- Direct Replacement for Series 22 & 33 Ball Valves
- Valve Dimensions:
61mm (2 13/32") x 41mm (1 5/8")

www.whleary.com

GLUE VALVE

Jet100™ Valve

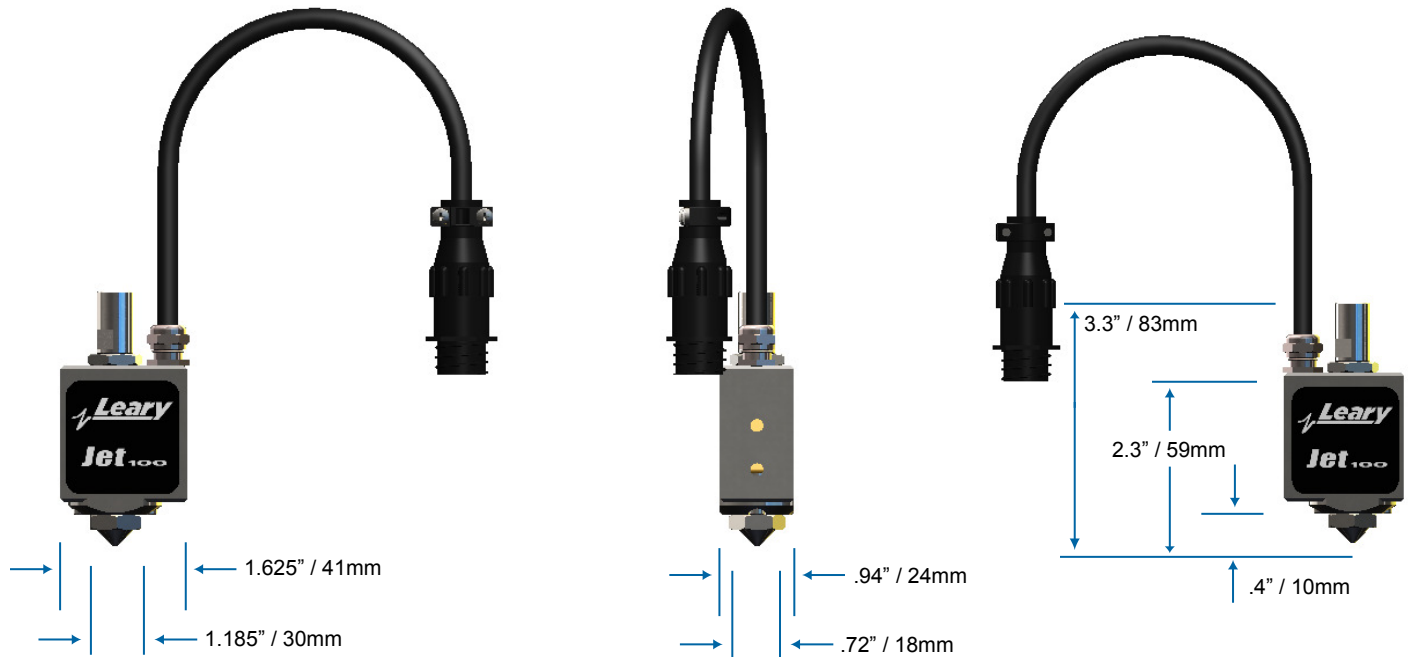

PHYSICAL CHARACTERISTICS

- Dimensions:
 - 1.625" / 41mm (l)
 - .94" / 24mm (w)
 - 3.3" / 83mm (h)
- Weight: .77lbs / .346kg

POWER REQUIREMENTS

- Spike: 48VDC
- Hold: 12VDC

NOZZLE SIZES

- PJB03000 - Nozzle, PafraJet B, .30mm
- PJB04000 - Nozzle, PafraJet B, .40mm
- PJB05000 - Nozzle, PafraJet B, .50mm
- PJB06000 - Nozzle, PafraJet B, .60mm
- PJB07000 - Nozzle, PafraJet B, .70mm
- PJB09900 - Nozzle, PafraJet B, 1.00mm

ADHESIVE

- 200 to 600 centipoise viscosity adhesive recommended

PART NUMBERS

- P9020 – Jet100 Valve with trigger & bracketry
- P9021 – Jet100 Valve w/o trigger
- P9120 – Jet100 Valve w/ IT02 Glue Detection sensor
- P9100 – Jet100 Valve w/ IT04 Glue Detection sensor
- P9022 – Self Contained, Jet100 Valve
- P9710045 – Jet100 Microadjust Glue Valve
- PJB10500 – Jet100 Repair Kit
- PJC10300 – Jet100 / 200 Spring
- PJC10500 – Jet100 / 200B Plunger
- PJC10400 – Jet100N / 200N Plunger
- A9300 – Waterflushing option

Corporate Office

8440 B West 183 Place
Tinley Park, IL 60487
USA
PH: +1(708) 444-4900
sales.us@whleary.com
www.whleary.com

European Office

2 Seax Way, Basildon
Essex SS15 6SW
United Kingdom
tel: +44 (0) 1268 490035
info@whleary.co.uk
www.whleary.co.uk

